GOT-3571T

5.7” VGA TFT Fanless

Touch Panel computer

User’s Manual

Disclaimers

The information in this manual has been carefully checked and is believed to be accurate. AXIOMTEK Co., Ltd. assumes no responsibility for any infringements of patents or other rights of third parties, which may result from its use.

AXIOMTEK assumes no responsibility for any inaccuracies that may be contained in this document. AXIOMTEK makes no commitment to update or to keep current the information contained in this manual.

AXIOMTEK reserves the right to make improvements to this document and/or product at any time and without notice.

No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of AXIOMTEK Co., Ltd.

ã **Copyright 2008 by AXIOMTEK Co., Ltd.**

All rights reserved.

November 2008, Version A1

Printed in Taiwan

Safety Approvals

- **u** CE Marking
- **u** FCC Class A

FCC Compliance

This equipment has been tested and complies with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. If not installed and used in accordance with proper instructions, this equipment might generate or radiate radio frequency energy and cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measurers:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

Shielded interface cables must be used in order to comply with emission limits.

Safety Precautions

Before getting started, read the following important cautions.

1. The GOT-3571T does not come equipped with an operating system. An operating system must be loaded first before installing any software into the computer.
2. Be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and place all electronic components in any static-shielded devices. Most electronic components are sensitive to static electrical charge.
3. Disconnect the power cord from the GOT-3571T before making any installation. Be sure both the system and the external devices are turned OFF. Sudden surge of power could ruin sensitive components. Make sure the GOT-3571T is properly grounded.
4. The brightness of the flat panel display decreases with usage. However, hours of use vary depending on the application environment.
5. Turn OFF the system power before cleaning. Clean the system using a cloth only. Do not spray any liquid cleaner directly onto the screen. The GOT-3571T comes with a touch screen. Although the touch screen is chemical resistant, it is recommended that you spray the liquid cleaner on a cloth first before wiping the screen. In case your system comes without the touch screen, you must follow the same procedure and not spray any cleaner on the flat panel directly.
6. Avoid using sharp objects to operate the touch screen. Scratches on the touch screen may cause malfunction or internal failure to the touch screen.
7. The flat panel display is not susceptible to shock or vibration. When assembling the GOT-3571T, make sure it is securely installed.

8. Do not open the system's back cover. If opening the cover for maintenance is a must, only a trained technician is allowed to do so. Integrated circuits on computer boards are sensitive to static electricity. To avoid damaging chips from electrostatic discharge, observe the following precautions:

   - ü Before handling a board or integrated circuit, touch an unpainted portion of the system unit chassis for a few seconds. This will help to discharge any static electricity on your body.
   - ü When handling boards and components, wear a wrist-grounding strap, available from most electronic component stores.

Trademarks Acknowledgments

AXIOMTEK is a trademark of AXIOMTEK Co., Ltd.

IBM, PC/AT, PS/2, VGA are trademarks of International Business Machines Corporation.

Intel and Pentium are trademarks of Intel Corporation.

MS-DOS, Microsoft C and Quick BASIC are trademarks of Microsoft Corporation.

VIA is a trademark of VIA Technologies, Inc.

SST is a trademark of Silicon Storage Technology, Inc.

UMC is a trademark of United Microelectronics Corporation.

Other brand names and trademarks are the properties of their respective owners.

This page does not contain any information.

Table of Contents

Disclaimers ii

Chapter 1 Introduction 1

1.1 General Description 1
1.2 Specifications 2
1.2.1 Main CPU board 2
1.2.2 I/O System 2
1.2.3 System Specification 3
1.3 Dimensions 3
1.4 I/O Outlets 5
1.5 Package list 6

Chapter 2 Hardware Installation 7

2.1 CompactFlash Card Installation 8
2.2 PC/104 Installation 9
2.3 Serial Port Interface 10
2.4 Ethernet 12
2.5 Mounting Way : Panel mount 12

Chapter 3 Phoenix-Award BIOS Utility 13

3.1 Entering Setup 13
3.2 Control Keys 14
3.3 Getting Help 14
3.4 The Main Menu 15
3.5 Standard CMOS Setup Menu 16
3.6 Advanced BIOS Features 19
3.7 Advanced Chipset Features 22
3.8 Integrated Peripherals 24
3.9 Power Management Setup 29
3.10 PnP/PCI Configuration Setup 31
3.11 PC Health Status 33
3.12 Load Optimized Defaults 34
3.13 Set Supervisor/User Password 35
3.14 Save & Exit Setup 36
3.15 Exit Without Saving 37

Chapter 4 Driver Installation 40

4.1 System 40
4.2 Touch Screen 41
4.2.1 Specification 41
4.2.2 Driver Installation - Windows Vista/XP 42

MEMO

Chapter 1
Introduction

This chapter contains the general information and the detail specifications of the GOT-3571T. Chapter 1 includes the following sections:

- **General Description**
- **System Specification**
- **Dimensions**
- **I/O Outlets**
- **Package List**

1.1 General Description

The GOT-3571T is a 5.7" fanless TFT VGA touch panel computer. It is equipped with CISI-based low power consumption processor, AMD LX800.

By supporting the option of external battery set, the GOT-3571T can continue system operation if a main power shortage ever happens. In addition, the PC/104 and Mini-PCI slots are reserved for expansion availability.

The GOT-3571T supports CompactFlash card and is the best choice for applications of factory automation, machinery maker, building automation and semi-conductor.

1.2 Specifications

1.2.1 Main CPU board

- **CPU:** AMD LX800 500MHz
- **System Chipset:** AMD LX + CS5536AD
- **BIOS:** Phoenix-Award 4Mbit with RPL/PXE Ethernet Boot ROM, Smartview and customer CMOS backup.
- **System Memory:** One 200-pin DDR SODIMM
  Maximum up to 1GB

1.2.2 I/O System

- **Standard I/O:**
  - 2 x serial ports (1 x RS-232, 1 x RS-232/422/485)
  - 2 x USB Ports 2.0 compliant
- **Ethernet**:
  Equipped with 1 x RJ-45 for 10/100 base-T
- **Audio**:
  Realtek AC'97 codec audio (Line-out)
- **Expansion:**
  Equipped with 1 x Mini-PCI & 1 x PC/104
- **Compact Flash Socket:**
  One Compact Flash Type II Socket

1.2.3 System Specification

- **5.7" VGA TFT LCD**
- **Disk drive housing:**
  - 1 x Compact Flash Type II Socket
- **DC 24V power input**
- **Heat dispensing design**
- **Net weight:**
  - 2.0 Kgs
- **Dimension (main body size):**
  - 208.5 x 167.3 x 66.5 mm
- **Operating temperature:**
  - O° to 45°C ; Relative umidity:50%
- **Relative humidity:**
  - 10% to 85% @ 40° C, non-condensing
- **Altitude:**
  - 10,000 ft. (3,000 meters)
- **Vibration (operating):**
  - 5 to 500 Hz, 2 G random
- **Shock (operating):**
  - 10 G peak acceleration (11 msec. duration)

1.3 Dimensions

The following diagrams show the dimensions and outlines of GOT-3571T.

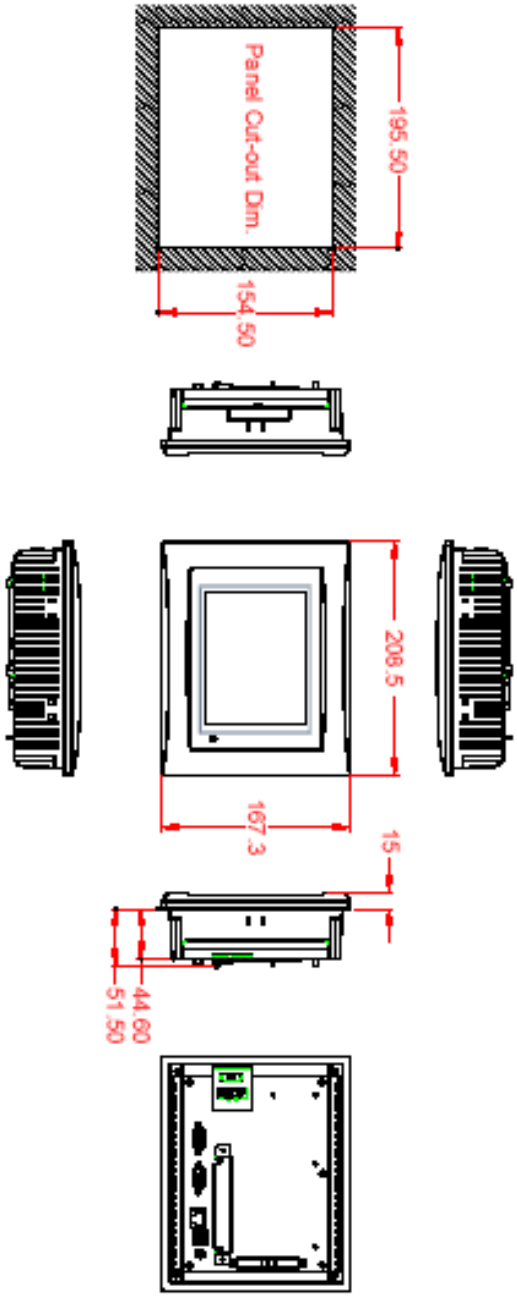

Note: The unit of length is millimeter.

1.4 I/O Outlets

The following figure shows the I/O locations of the GOT-3571T.

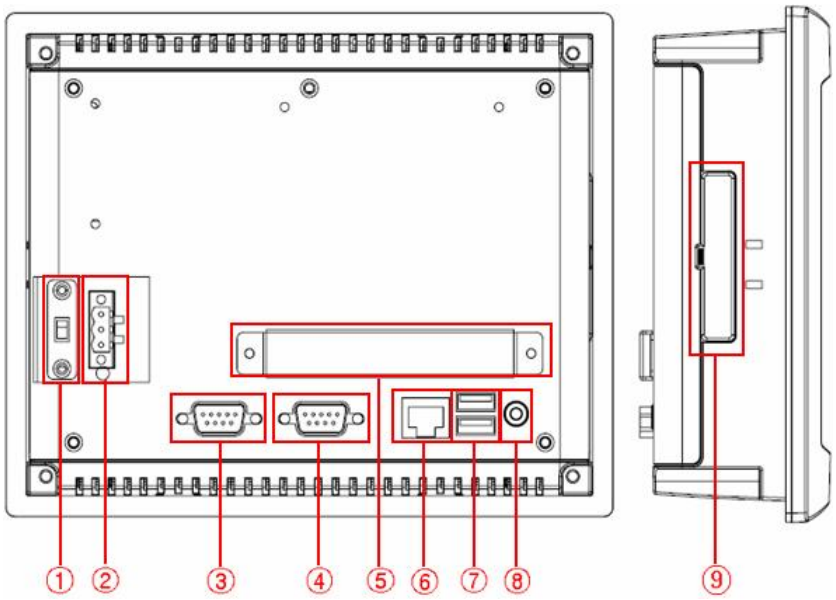

1:	Power Switch	**6:**	LAN
2:	DC power connector	**7:**	USB 2.0 x 2
3:	COM 2 (RS-232)	**8:**	Line-out
4:	COM 1 (RS-232/422/485)	**9:**	CompactFlash card
5:	PC/104 slot		

1.5 Package list

When you receive the GOT-3571T, there are following items in the package. If you can not find it, please contact AXIOMTEK distributors.

1. GOT-3571T x 1
2. Panel mount kit x 6
3. Driver CD x1

Chapter 2
Hardware Installation

The GOT-3571T provides rich I/O ports and flexible expansions for you to meet different demand such as PCMCIA, WLAN module and so on. The chapter will show you how to install the hardware. It includes :

- **n** CompactFlash Card
- **n** PC/104
- **n** Serial Port
- **n** Ethernet
- **n** Mounting Way

2.1 CompactFlash Card Installation

GOT-3571T offers one CF slot for users to install CompactFlash card. Please refer to the following instructions and illustration:

Remove the rubber cover at left-side.

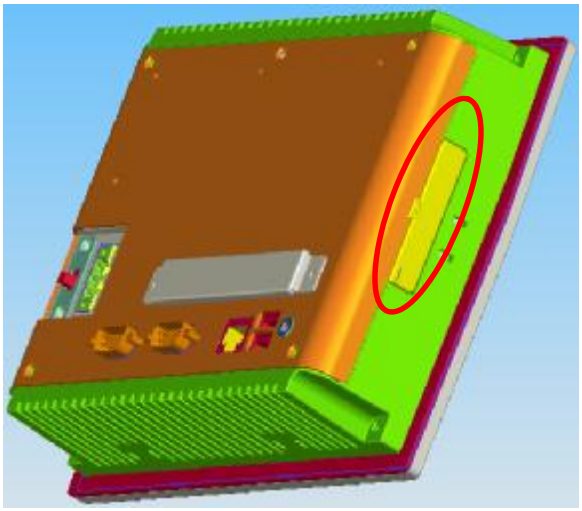

Install CompactFlash card in the GOT-3571T.

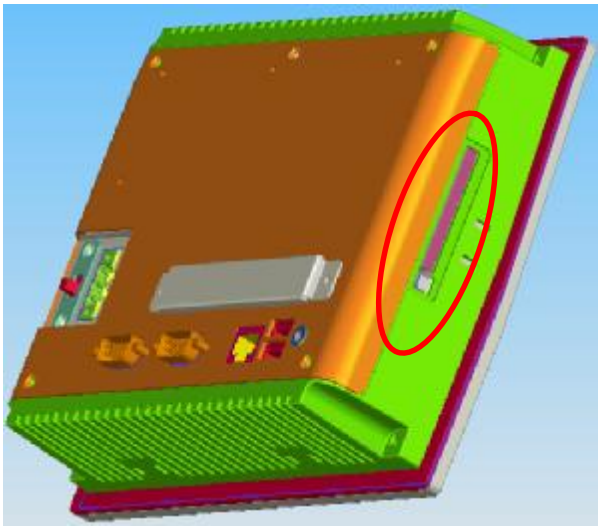

2.2 PC/104 Installation

The GOT-3571T offers a convenient expansion for users to install PC/104 module such as PCMCIA, WLAN, COM port card and so on. Please follow the steps:

1. Unscrew screws to remove the bracket.

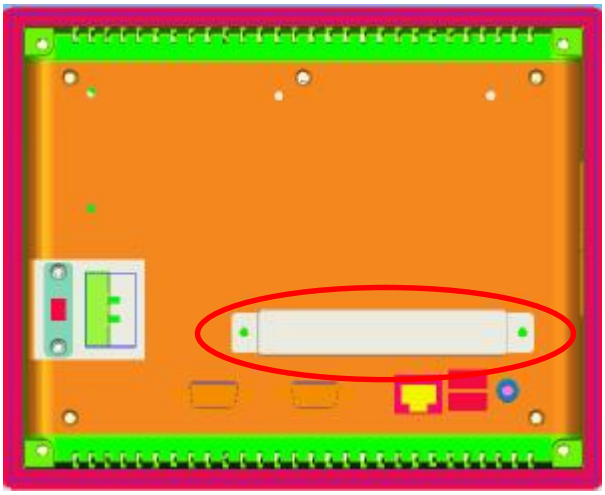

2. Install PC/104 module.

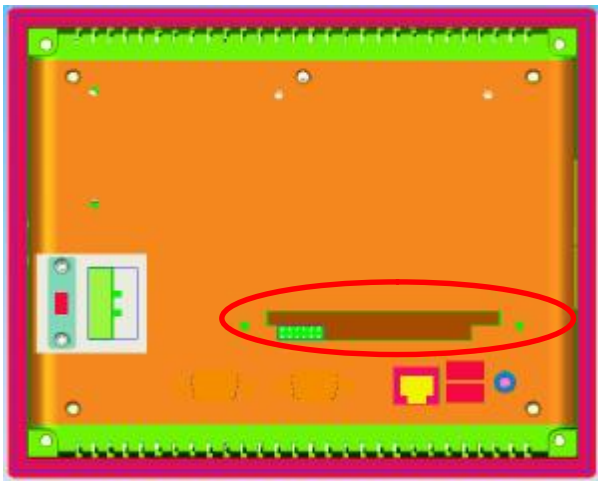

PC/104 Bus Pin Assignment

Pin	Pin Name	Pin	Pin Name	Pin	Pin Name	Pin	Pin Name
1	IOCHCHK	2	GND	3	SD7	4	RESETDRV
5	SD6	6	+5V	7	SD5	8	IRQ9
9	SD4	10	-5V	11	SD3	12	DRQ2
13	SD2	14	-12V	15	SD1	16	ENDXFR
17	SD0	18	+12V	19	IOCHRDY	20	GND
21	AEN	22	SMEMW	23	SA19	24	SMEMR
25	SA18	26	IOW	27	SA17	28	IOR
29	SA16	30	DACK3	31	SA15	32	DRQ3
33	SA14	34	DACK1	35	SA13	36	DRQ1
37	SA12	38	REFRESH	39	SA11	40	SYSCLK
41	SA10	42	IRQ7	43	SA9	44	IRQ6
45	SA8	46	IRQ5	47	SA7	48	IRQ4
49	SA6	50	IRQ3	51	SA5	52	DACK2
53	SA4	54	TC	55	SA3	56	SALE
57	SA2	58	+5V	59	SA1	60	OSC
61	SA0	62	GND	63	GND	64	GND

2.3 Serial Port Interface

The GOT-3571T has two onboard serial ports, COM1 (RS-232/422/485) & COM2 (RS-232).

The pin assignments are listed below:

	Description
1	Data Carrier Detect (DCD)
2	Receive Data (RXD)
3	Transmit Data (TXD)
4	Data Terminal Ready (DTR)
5	Ground (GND)
6	Data Set Ready (DSR)
7	Request to Send (RTS)
8	Clear to Send (CTS)
9	Ring Indicator (RI)



In addition, COM1 can be set for RS-232/422/485 by jumper. The jump setting is listed as below:

COM1	JP12	JP10	JP11
RS-232 (default)	1-2	3-5, 4-6	3-5, 4-6
RS-422	3-4, 7-8	1-3, 2-4	1-3, 2-4
RS-485	5-6, 7-8	1-3, 2-4	1-3, 2-4

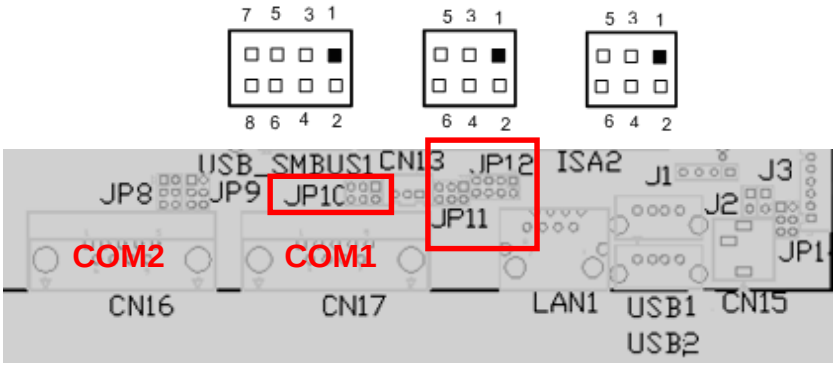

When COM1 set to RS-422 or RS-485, the pin assignments are listed below:

The COM1 RS-422/485 pin assignment

Pin	Description	
	R2-422	RS-485
1	TX-	DATA-
2	TX+	DATA+
3	RX+	No connector
4	RX-	No connector

2.4 Ethernet

The GOT-3571T provides an NE2000 compatible Ethernet (RJ-45) interface. For network connection, just plug in one cable end of the GOT-3571T 10/100 Base-T Hub into the standard RJ-45 connector. The pin assignment of the RJ-45 is listed below;

Pin	Signal
1	TX+ (Data transmission positive
2	TX- (Data transmission negative)
3	Rx+(Data reception positive)
4	RJ45 termination
5	RJ45 termination
6	Rx- (Data reception negative)
7	RJ45 termination
8	RJ45 termination



RJ-45

2.5 Mounting Way : Panel mount

The GOT-3571T is designed for panel mount application. To mount the GOT-3571T, the standard set of mounting kit (included in the system packaging) is needed.

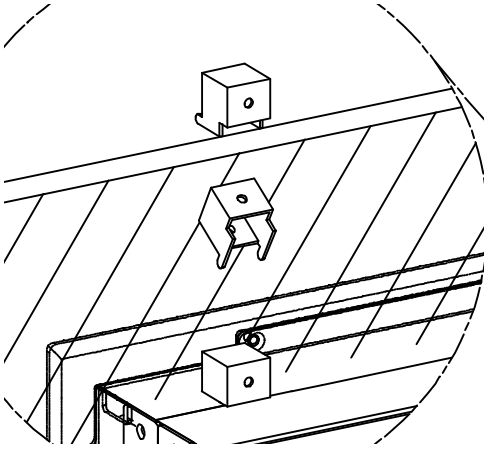

Chapter 3
Phoenix-Award BIOS Utility

The Phoenix-Award BIOS provides users with a built-in Setup program to modify basic system configuration. All configured parameters are stored in a battery-backed-up RAM (CMOS RAM) to save the Setup information whenever the power is turned off.

3.1 Entering Setup

There are two ways to enter the Setup program. You may either turn ON the computer and press <Del> immediately, or press the <Del> and/or <Ctrl>, <Alt>, and <Esc> keys simultaneously when the following message appears at the bottom of the screen during POST (Power on Self Test).

TO ENTER SETUP PRESS DEL KEY

If the message disappears before you respond and you still want to enter Setup, please restart the system to try it again. Turning the system power OFF and ON, pressing the "RESET" button on the system case or simultaneously pressing <Ctrl>, <Alt>, and <Del> keys can restart the system. If you do not press keys at the right time and the system doesn't boot, an error message will pop out to prompt you the following information:

PRESS <F1> TO CONTINUE, <CTRL-ALT-ESC> OR <DEL> TO ENTER SETUP

3.2 Control Keys

Up arrow	Move cursor to the previous item
Down arrow	Move cursor to the next item
Left arrow	Move cursor to the item on the left hand
Right arrow	Move to the item in the right hand
Esc key	Main Menu -- Quit and delete changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
PgUp/"+" key	Increase the numeric value or make changes
PgDn/"-" key	Decrease the numeric value or make changes
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
(Shift) F2 key	Change color from total 16 colors. F2 to select color forward, (Shift) F2 to select color backward
F3 key	Reserved
F4 key	Reserved
F5 key	Restore the previous CMOS value from CMOS, only for Option Page Setup Menu
F6 key	Load the default CMOS value from BIOS default table, only for Option Page Setup Menu
F7 key	Load the Setup default, only for Option Page Setup Menu
F8 key	Reserved
F9 key	Reserved
F10 key	Save all the CMOS changes, only for Main Menu

3.3 Getting Help

- **Main Menu**
  The online description of the highlighted setup function is displayed at the bottom of the screen.

- **Status Page Setup Menu/Option Page Setup Menu**
  Press <F1> to pop out a small Help window that provides the description of using appropriate keys and possible selections for highlighted items. Press <F1> or <Esc> to exit the Help Window.

3.4 The Main Menu

Once you enter the Award BIOS CMOS Setup Utility, the Main Menu appears on the screen. In the Main Menu, there are several Setup functions and a couple of Exit options for your selection. Use arrow keys to select the Setup Page you intend to configure then press <Enter> to accept or enter its sub-menu.

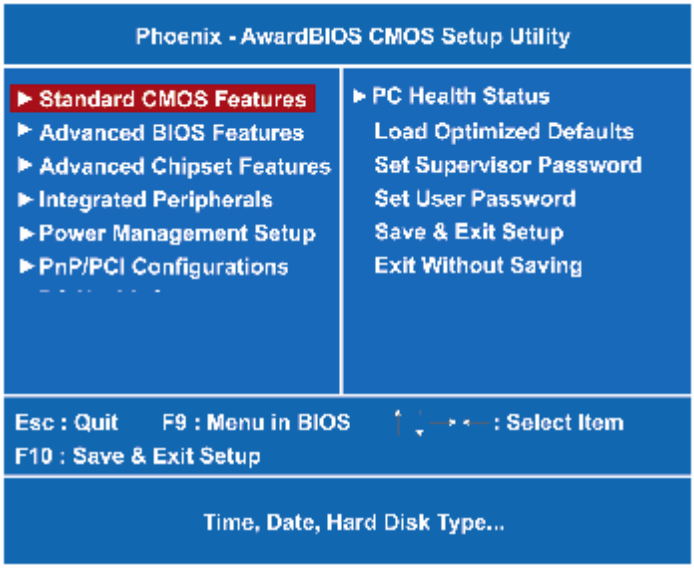

NOTE *If your computer can not boot after making and saving system changes with Setup, the Award BIOS will reset your system to the CMOS default settings via its built-in override feature.*

It is strongly recommended that you should avoid changing the chipset's defaults. Both Award and your system manufacturer have carefully set up these defaults that provide the best performance and reliability.

3.5 Standard CMOS Setup Menu

The Standard CMOS Setup Menu displays basic information about your system. Use arrow keys to highlight each item, and use <PgUp> or <PgDn> key to select the value you want in each item.

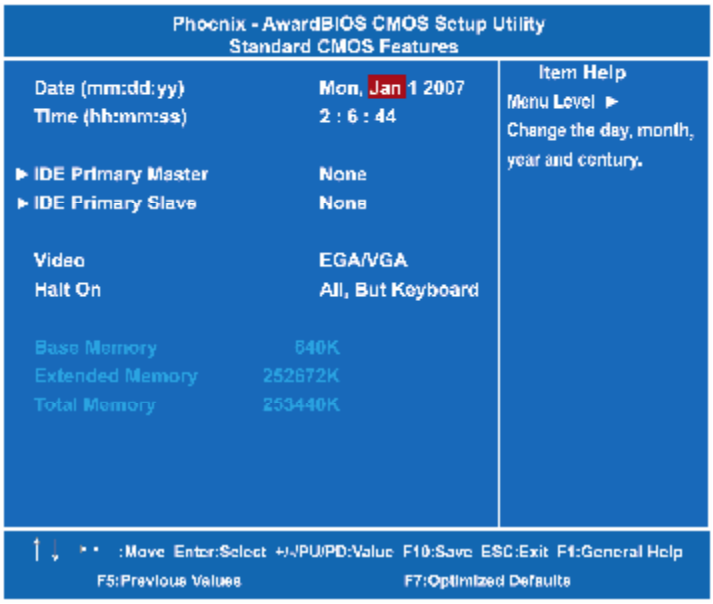
Phoenix - AwardBIOS CMOS Setup Utility
Standard CMOS Features
Item Help
Date (mm:dd:yy) Mon, Jan 1 2007
Time (hh:mm:ss) 2 : 6 : 44
▶ IDE Primary Master None
▶ IDE Primary Slave None
Video EGA/VGA
Halt On All, But Keyboard
Base Memory 640K
Extended Memory 252672K
Total Memory 253440K
Menu Level ▶
Change the day, month, year and century.
:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5:Previous Values F7:Optimized Defaults

- **Date**

  The date format is <day>, <date> <month> <year>. Press <F3> to show the calendar.

day	It is determined by the BIOS and read only, from Sunday to Saturday.
date	It can be keyed with the numerical/ function key, from 1 to 31.
month	It is from January to December.
year	It shows the current year of BIOS.

- **Time**

  This item shows current time of your system with the format <hour> <minute> <second>. The time is calculated based on the 24-hour military-time clock. For example, 1 p.m. is 13:00:00.

- **IDE Primary Master/Primary Slave**
  These items identify the types of each IDE channel installed in the computer. There are 45 predefined types (Type 1 to Type 45) and 2 user's definable types (Type User) for Enhanced IDE BIOS. Press <PgUp>/<+> or <PgDn>/<–> to select a numbered hard disk type, or directly type the number and press <Enter>. Please be noted your drive's specifications must match the drive table. The hard disk will not work properly if you enter improper information. If your hard disk drive type does not match or is not listed, you can use Type User to manually define your own drive type.
  If selecting Type User, you will be asked to enter related information in the following items. Directly key in the information and press <Enter>. This information should be provided in the documentation from your hard disk vendor or the system manufacturer.
  If the HDD interface controller supports ESDI, select "Type 1".
  If the HDD interface controller supports SCSI, select "None".
  If the HDD interface controller supports CD-ROM, select "None".

CYLS.	number of cylinders	**LANDZONE**	landing zone
HEADS	number of heads	**SECTORS**	number of sectors
PRECOMP	write precom	**MODE**	HDD access mode

  If there is no hard disk drive installed, select NONE and press <Enter>.

- **Video**
  Select the display adapter type for your system.

l Halt On

This item determines whether the system will halt or not, if an error is detected while powering up.

No errors	The system booting will halt on any errors detected. (default)
All errors	Whenever BIOS detects a non-fatal error, the system will stop and you will be prompted.
All, But Keyboard	The system booting will not stop for a keyboard error; it will stop for other errors.
All, But Diskette	The system booting will not stop for a disk error; it will stop for other errors.
All, But Disk/Key	The system booting will not stop for a keyboard or disk error; it will stop for other errors.

Press <Esc> to return to the Main Menu page.

3.6 Advanced BIOS Features

This section allows you to configure and improve your system, to set up some system features according to your preference.

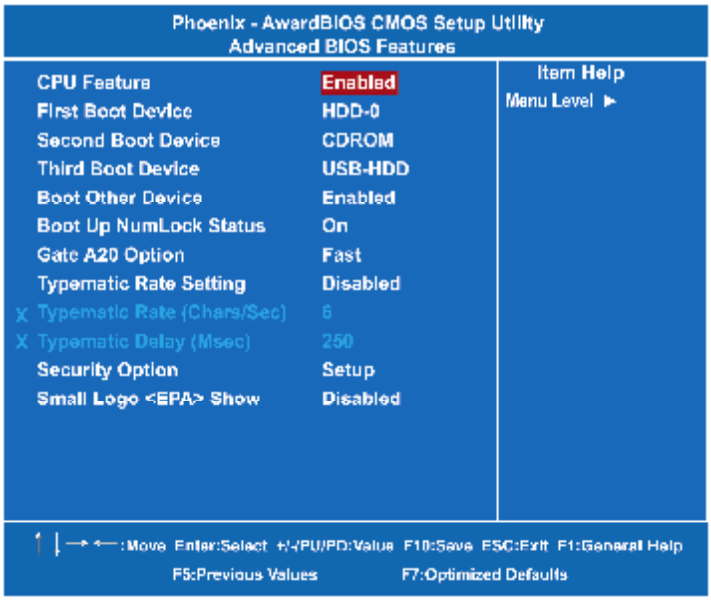
Phoenix - AwardBIOS CMOS Setup Utility
Advanced BIOS Features
CPU Feature Enabled
First Boot Device HDD-0
Second Boot Device CDROM
Third Boot Device USB-HDD
Boot Other Device Enabled
Boot Up NumLock Status On
Gate A20 Option Fast
Typematic Rate Setting Disabled
X Typematic Rate (Chars/Sec) 6
X Typematic Delay (Msec) 250
Security Option Setup
Small Logo <EPA> Show Disabled
Item Help
Menu Level ►
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5:Previous Values F7:Optimized Defaults

- **First/Second/Third Boot Device**
  These items let you select the 1st, 2nd, and 3rd devices that the system will search for during its boot-up sequence. The wide range of selection includes Floppy, LS120, ZIP100, HDD0~3, SCSI, and CDROM.

- **Boot Other Device**
  This item allows users to enable or disable the boot device not listed in the First/Second/Third boot devices option above. The default setting is "*Enabled"*.

- **Boot Up NumLock Status**
  Set the the Num Lock status when the system is powered on. The default value is *"On"*.

- **Gate A20 Option**
  The default value is *"Fast"*.

Normal	The A20 signal is controlled by keyboard controller or chipset hardware.
Fast	Default: Fast. The A20 signal is controlled by Port 92 or chipset specific method.

- **Typematic Rate Setting**
  This item determines the typematic rate of the keyboard. The default value is *"Disabled"*.

Enabled	Enable typematic rate and typematic delay programming.
Disabled	Disable typematic rate and typematic delay programming. The system BIOS will use default value of these 2 items, controlled by keyboard.

- **Typematic Rate (Chars/Sec)**
  This option refers to character numbers typed per second by the keyboard. The default value is *"6"*.

6	6 characters per second
8	8 characters per second
10	10 characters per second
12	12 characters per second
15	15 characters per second
20	20 characters per second
24	24 characters per second
30	30 characters per second

- **Typematic Delay (Msec)**
  This option defines how many milliseconds must elapse before a held-down key begins generating repeat characters. The default value is *"250"*.

250	250 msec
500	500 msec
750	750 msec
1000	1000 msec

- **Security Option**
  This item allows you to limit access to the system and Setup, or just to Setup. The default value is *"Setup"*.

System	If a wrong password is entered at the prompt, the system will not boot, the access to Setup will be denied, either.
Setup	If a wrong password is entered at the prompt, the system will boot, but the access to Setup will be denied.

NOTE *To disable the security, select PASSWORD SETTING at Main Menu and then you will be asked to enter a password. Do not type anything, just press <Enter> and it will disable the security. Once the security is disabled, the system will boot and you can enter Setup freely.*

- **Small Logo(EPA) Show**
  If enabled, the EPA logo will appear during system booting up; if disabled, the EPA logo will not appear.

Press <Esc> to return to the Main Menu page.

3.7 Advanced Chipset Features

This section contains completely optimized chipset's features on the board that you are strongly recommended to leave all items on this page at their default values unless you are very familiar with the technical specifications of your system hardware.

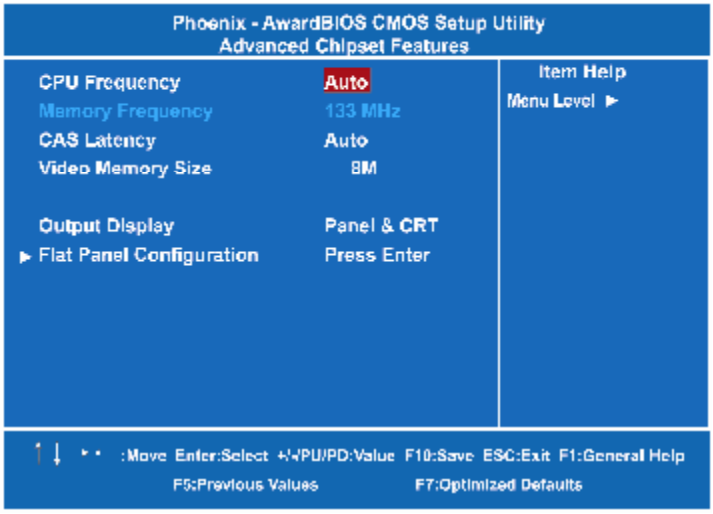

- **CPU Frequency**
  Use this item to set the CPU Frequency with these options: Auto, 333MHz, 400MHz, 433MHz and 500MHz. The default setting is "*Auto*".

- **Memory Frequency**
  This item helps you set main memory frequency. When using an external graphics card, it can be adjusted to enable the best performance for your system.

- **CAS Latency Time**
  You can select CAS latency time to HCLKs 2, 3, or Auto. The board designer should have set up these values in accordance with the installed DRAM. Do not change these values unless you have to change the specifications of the installed DRAM or CPU.

- **Video Memory Size**
  The available options are "*8M*", "*16M*", "*32M*", "*64M*", "*128M*" and

"*254M*".

- **Output Display**
  This item allows you to choose the output for your system display. Configuration options are "*CRT*", "*Flat Panel*" and "*Panel & CRT*". The default value is "*Panel & CRT*".

- **Flat Panel Configuration**
  Scroll to this item and press <Enter> to view the Flat Panel Configuration sub menu.

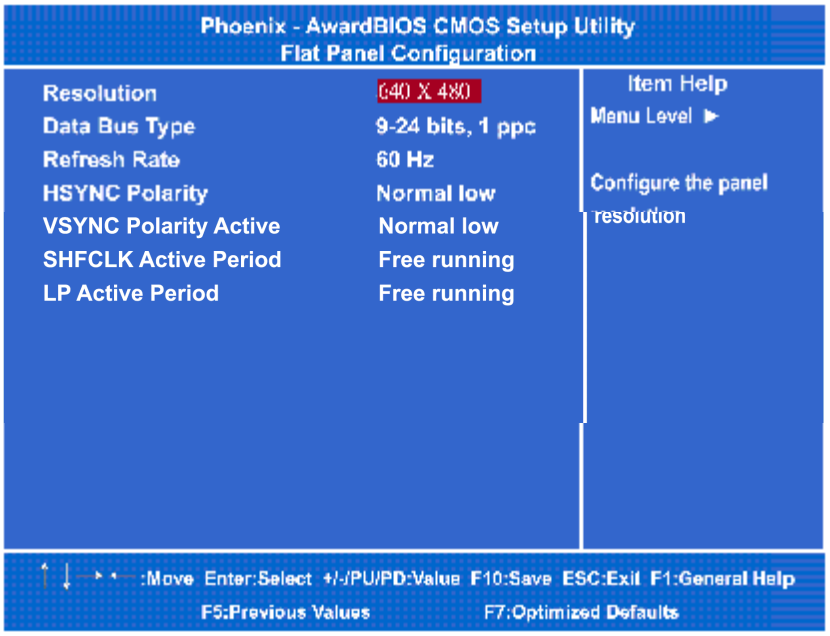

  - **Resolution**
    Select the resolution for LVDS panel.
  - **Data Bus Type**
    Select the Data Bus Type for LVDS panel.
  - **Refresh Rate**
    Select the refresh rate for LVDS panel.
  - **HSYNC Polarity**
    The available options are "*HI*" and "*LOW*".
  - **VSYNC Polarity Active**
    The available options are "*HI*" and "*LOW*".
  - **SHFCLK Active Period**

Select the shift clock (SHFCLK) to be either free running, or active only during the display period. Some TFT panels recommend keeping the shift clock running during the retrace time.

ø **LP Active Period**

Select the polarity of the LDE/MOD pin. This can be used for panels that require an active low timing LDE interface signal.

Press <Esc> twice to return to the Main Menu page.

3.8 Integrated Peripherals

This section allows you to configure your SuperIO Device, IDE Function and Onboard Device.

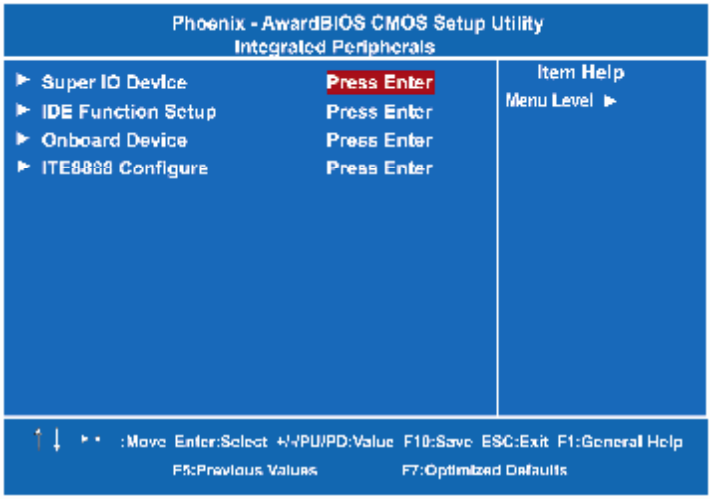

l Super IO Device

Scroll to this item and press <Enter> to view the sub menu Super IO Device.

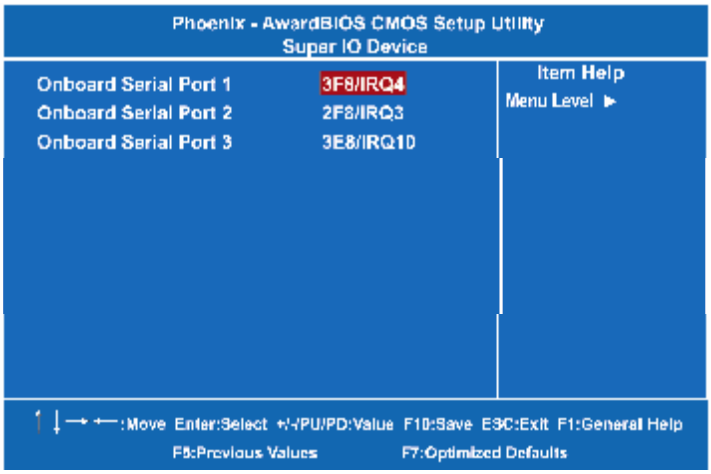

ø **Onboard Serial Port 1/2/3**

Select an address and corresponding interrupt for the serial port. Options: 3F8/IRQ4, 2F8/IRQ3, 3E8/IRQ10, 2E8/IRQ11, 338/IRQ5, 238/IRQ7, Auto and Disabled.

Press <Esc> to return to the Integrated Peripherals page.

I IDE Function Setup

Scroll to this item and press <Enter> to view the sub menu IDE Function Setup.

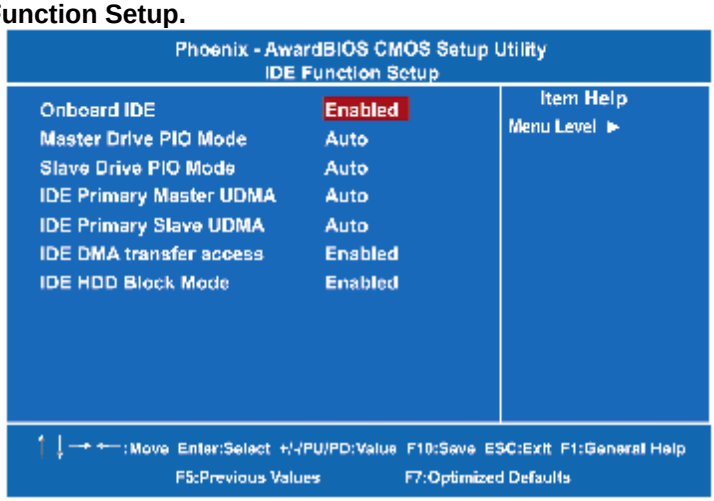

- **Master/Slave Drive PIO Mode**
  The four IDE PIO (Programmed Input/Output) fields let you set a PIO mode (0-4) for each of the four IDE devices that the onboard IDE interface supports. Modes 0 to 4 provide successively increased performance. In Auto mode, the system automatically determines the best mode for each device.
- **IDE Primary/Secondary Master/Slave UDMA**
  Select the mode of operation for the IDE drive. Ultra DMA-33/66/100/133 implementation is possible only if your IDE hard drive supports it and the operating environment includes a DMA driver. If your hard drive and system software both support Ultra DMA-33/66/100/133, select Auto to enable UDMA mode by BIOS.
- **IDE DMA transfer access**
  Automatic data transfer between system memory and IDE device with minimum CPU intervention. This improves data throughput and frees CPU to perform other tasks.
- **IDE HDD Block Mode**
  Block mode is also called block transfer, multiple commands, or multiple sector read/write. If your IDE hard drive supports block mode (most new drives do), select Enabled for automatic detection of the optimal number of block

read/writes per sector the drive can support.
Press <Esc> to return to the Integrated Peripherals page.

l Onboard Device

Scroll to this item and press <Enter> to view the sub menu Onboard Device.

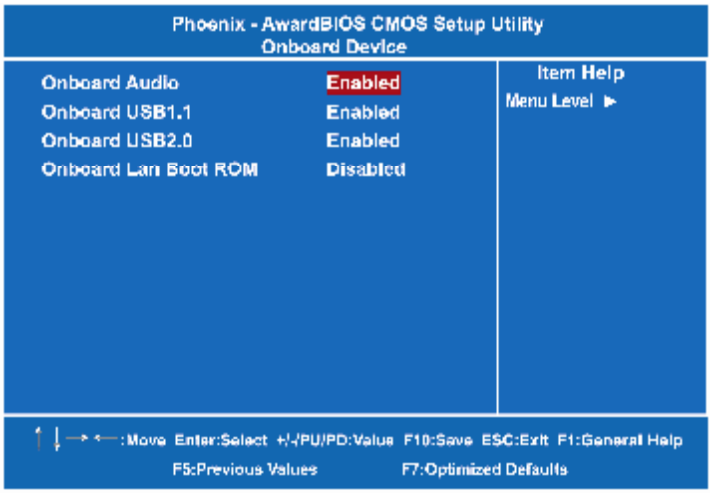

- **Onboard Audio**
  Use this item to enable or disable the onboard Audio function.
- **Onboard USB1.1**
  Enable this item if you are using the EHCI (USB1.1) controller in the system.
- **Onboard USB 2.0**
  Enable this item if you are using the EHCI (USB2.0) controller in the system.
- **Onboard Lan Boot ROM**
  Use this item to enable or disable the Boot ROM function of the onboard LAN chip when the system boots up.

Press <Esc> to return to the Integrated Peripherals page.

I ITE8888 Configure

Scroll to this item and press <Enter> to view the sub menu ITE8888 Configure.

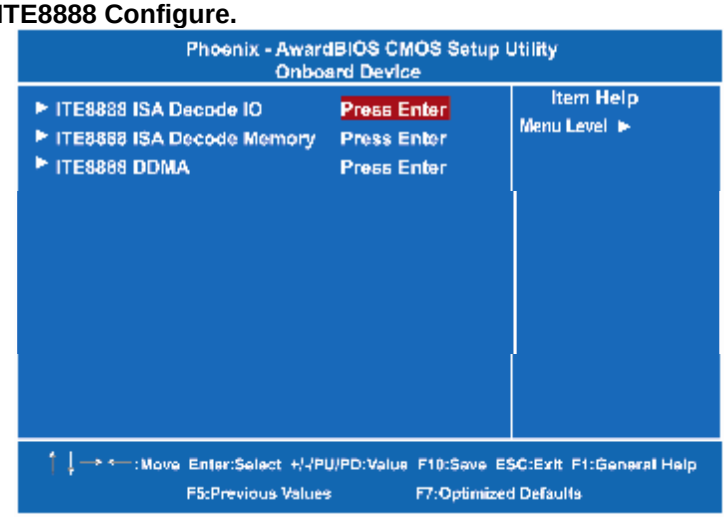

Press <Esc> twice to return to the Main Menu page.

3.9 Power Management Setup

The Power Management Setup allows you to save energy of your system effectively. It will shut down the hard disk and turn OFF video display after a period of inactivity.

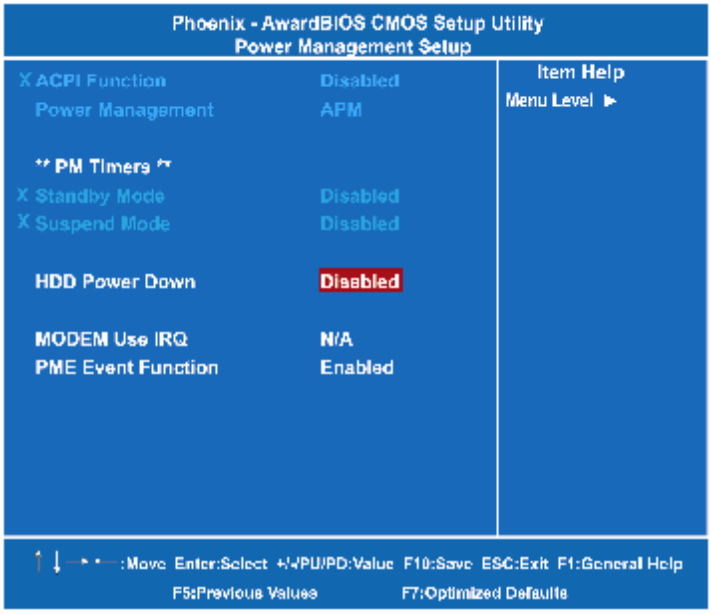

- **ACPI Function**
  This item allows you to enable/disable the Advanced Configuration and Power Management (ACPI). The function is always "*Enabled*".

- **Power Management**
  This option allows you to select the type of power Management. Options are: "APM", "ACPI".

**** PM Timers ****

- **Standby Mode**
  After the selected period of system inactivity, the fixed disk drive and the video shut off while all other devices still operate at full speed.

- **Suspend Mode**
  After a selected period of system inactivity (1 minute to 1 hour), all devices except the CPU shut off. The default value is *"Disabled"*.

Disabled	The System will never enter the SUSPEND mode.
1/2/4/6/8/10/20/30/40 Min/1 Hr	It defines continuous idle time before the system entering the SUSPEND mode. If any item defined in (J) is enabled and active, the SUSPEND timer will be reloaded.

- **HDD Power Down**
  If HDD activity is not detected for a specified length of time in this field, the hard disk drive will be powered down while other devices remain active.

- **Moden Use IRQ**
  If you want an incoming call on a modem to automatically resume the system from a powersaving mode, use this item to specify the interrupt request line (IRQ) used by the modem. You might have to connect the fax/modem to the board Wake On Modem connector for working this feature.

Press <Esc> to return to the Main Menu page.

3.10 PnP/PCI Configuration Setup

This section describes the configuration of PCI (Personal Computer Interconnect) bus system, which allows I/O devices to operate at speeds close to the CPU speed while communicating with other important components. This section covers very technical items that only experienced users could change default settings.

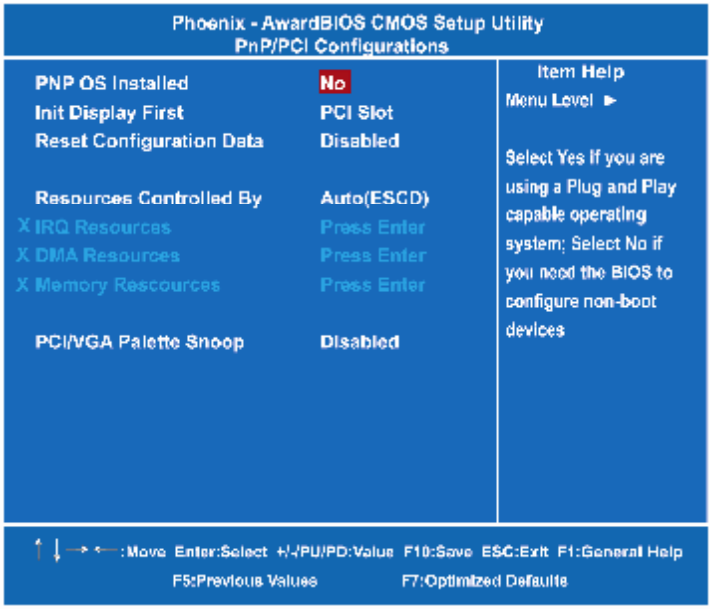

- **PNP OS Installed**
  Select Yes if the system operating environment is Plug-and-Play aware (e.g., Windows 95). The default value is "No".

- **Init Display First**
  This item allows you to decide whether PCI Slot or AGP to be the first primary display card.

- **Reset Configuration Data**
  Normally, you leave this item Disabled. Select Enabled to reset Extended System Configuration Data (ESCD) when you exit Setup or if installing a new add-on cause the system reconfiguration a serious conflict that the operating system can not boot. Options are: "Enabled, Disabled".

- **Resources Controlled By**
  The Phoenix-Award Plug and Play BIOS can automatically configure all boot and Plug and Play-compatible devices. If you select Auto, all interrupt request (IRQ), DMA assignment, and Used DMA fields disappear, as the BIOS automatically assigns them. The default value is "Manual".

- **IRQ Resources**
  When resources are controlled manually, assign each system interrupt to one of the following types in accordance with the type of devices using the interrupt:
  1. Legacy ISA Devices compliant with the original PC AT bus specification, requiring a specific interrupt (such as IRQ4 for serial port 1).
  2. PCI/ISA PnP Devices compliant with the Plug and Play standard, whether designed for PCI or ISA bus architecture.

  The default value is "PCI/ISA PnP".

- **DMA Resources**
  When resources are controlled manually, assign each system DMA channel as one of the following types, depending on the type of device using the interrupt:
  Legcy ISA Devices compliant with the original PC AT bus specification, requiring a specific DMA channel.
  PCI/ISA PnP Devices compliant with the Plug and Play standard, whether designed for PCI or ISA bus architecture.
  The default value is "PCI/ISA PnP".

- **PCI/VGA Palette Snoop**
  Some non-standard VGA display cards may not show colors properly. This item allows you to set whether MPEG ISA/VESA VGA Cards can work with PCI/VGA or not. When enabled, a PCI/VGA can work with a MPEG ISA/VESA VGA card; when disabled, a PCI/VGA cannot work with a MPEG ISA/VESA Card.

Press <Esc> to return to the Main Menu page.

3.11 PC Health Status

This section supports hardware monitoring that lets you monitor those parameters for critical voltages, temperatures and fan speed of the board.

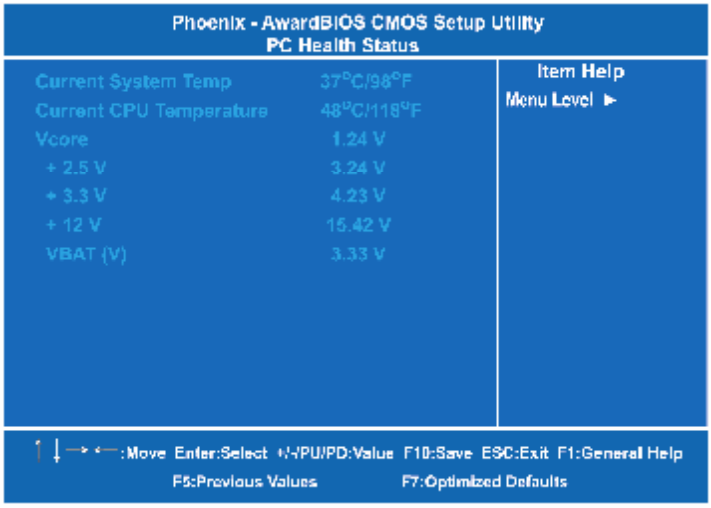

- **Current SYSTEM Temp**
  Show you the current system temperature.
- **Current CPU Temp**
  The current system CPU temperature will be automatically detected by the system.
- **Vcore 2.5V/3.3V/+12V/VBAT(V)**
  Show you the voltage of 2.5V/3.3V/+12V/VBAT.

Press <Esc> to return to the Main Menu page.

3.12 Load Optimized Defaults

This option allows you to load your system configuration with default values. These default settings are optimized to enable high performance features.

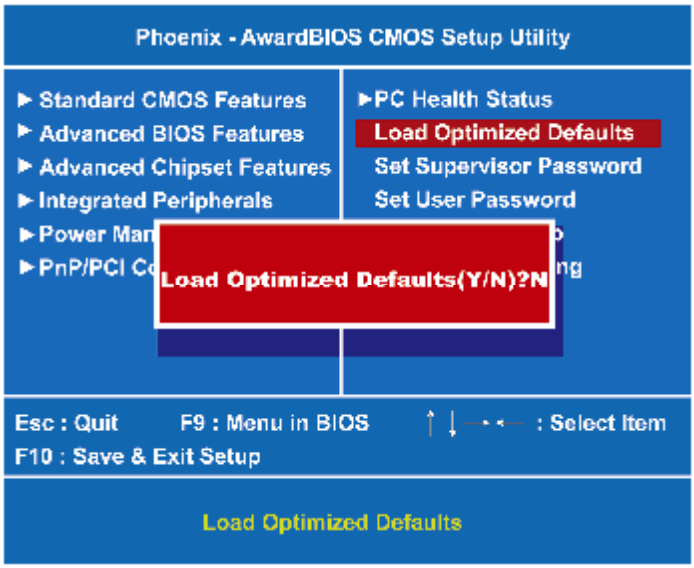

To load CMOS SRAM with SETUP default values, please enter "Y". If not, please enter "N".

3.13 Set Supervisor/User Password

You can set a supervisor or user password, or both of them. The differences between them are:

1. **Supervisor password:** You can enter and change the options on the setup menu.
2. **User password:** You can just enter, but have no right to change the options on the setup menu.

When you select this function, the following message will appear at the center of the screen to assist you in creating a password.

ENTER PASSWORD

Type a maximum eight-character password, and press <Enter>. This typed password will clear previously entered password from the CMOS memory. You will be asked to confirm this password. Type this password again and press <Enter>. You may also press <Esc> to abort this selection and not enter a password.

To disable the password, just press <Enter> when you are prompted to enter a password. A message will confirm the password is getting disabled. Once the password is disabled, the system will boot and you can enter Setup freely.

PASSWORD DISABLED

When a password is enabled, you have to type it every time you enter the Setup. It prevents any unauthorized persons from changing your system configuration.

Additionally, when a password is enabled, you can also require the BIOS to request a password every time the system reboots. This would prevent unauthorized use of your computer.

You decide when the password is required for the BIOS Features Setup Menu and its Security option. If the Security option is set to "System", the password is required during booting up and entry into the Setup; if it is set as "Setup", a prompt will only appear before entering the Setup.

3.14 Save & Exit Setup

This section allows you to determine whether or not to accept your modifications. Type "Y" to quit the setup utility and save all changes into the CMOS memory. Type "N" to bring you back to the Setup utility.

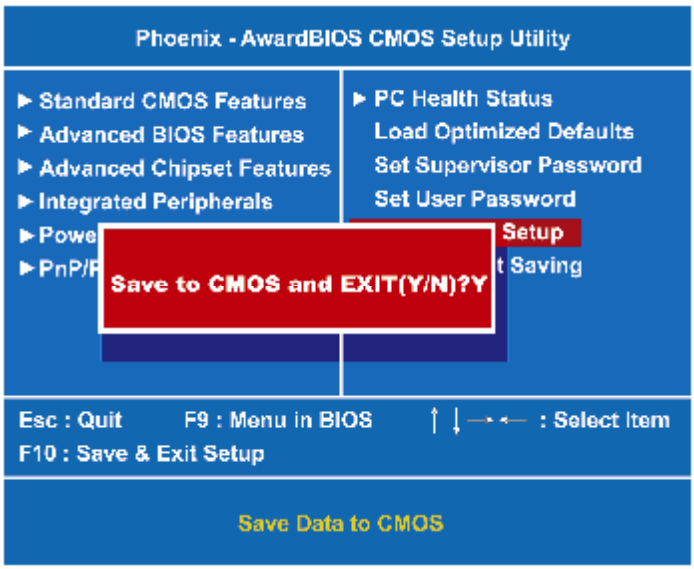

3.15 Exit Without Saving

Select this option to exit the Setup utility without saving changes you have made in this session. Type "Y", and it will quit the Setup utility without saving your modifications. Type "N" to return to the Setup utility.

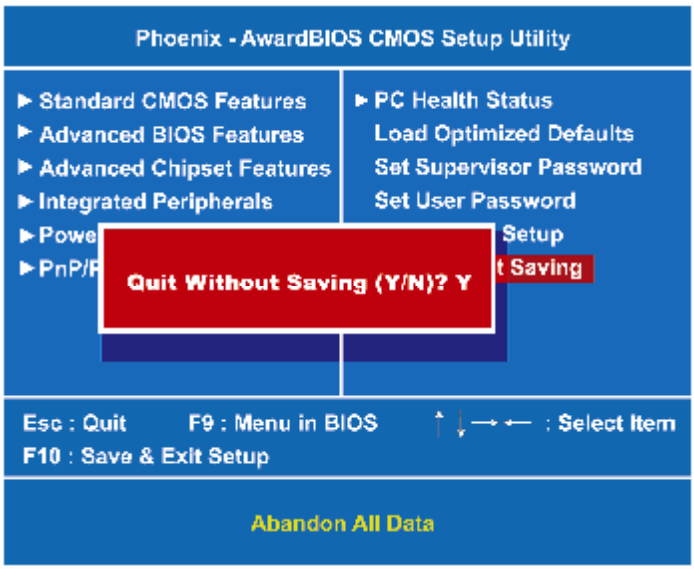

MEMO

Chapter 4
Driver Installation

4.1 System

GOT-3571T supports Windows Vista/XP. To facilitate the installation of the system driver, please carefully read the instructions in this chapter before start installing.

1. Here is the path for the system driver:

   \Driver\XP\

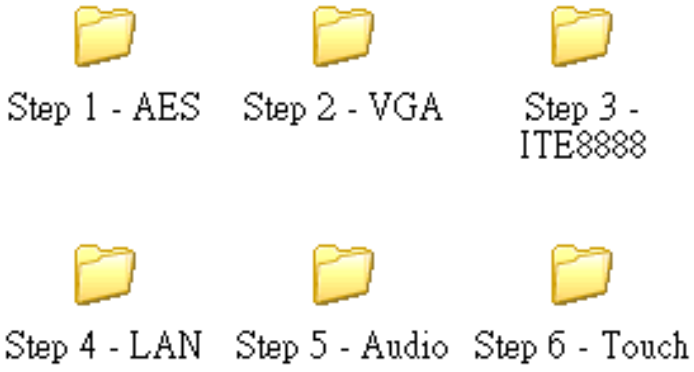

2. Select all files, follow the installing procedure, and finally press OK.

4.2 Touch Screen

4.2.1 Specification

Touch Screen	5-wire Analog Resistive type
Touch Screen Controller	PenMount DMC9000 Touch Screen Controller IC
Communications	RS-232
Baud Rate	19200 baud rate fixed
Resolution	1024 x 1024 (10 bit A/D converter inside)
Power Input	2.7V ~ 5.5V
Power Consumption	Active: 3.6mA / Idle Mode: 1.0mA

4.2.2 Driver Installation - Windows Vista/XP

The **GOT-3571T** provides a driver of the touch screen that users can install it under operating system Windows Vista/XP. To facilitate this touch screen driver installation, users should read the instructions in this chapter carefully before start the installation.

1. Insert Driver CD and follow the path to select the "\Driver\XP\Step 6 - Touch".

2. Follow the installing procedure and press OK.
3. Click Start menu and select "PenMount Utilities", and then a "PenMount Control Panel" pops out.

Note *Please choose COM3 for touch screen installation.*

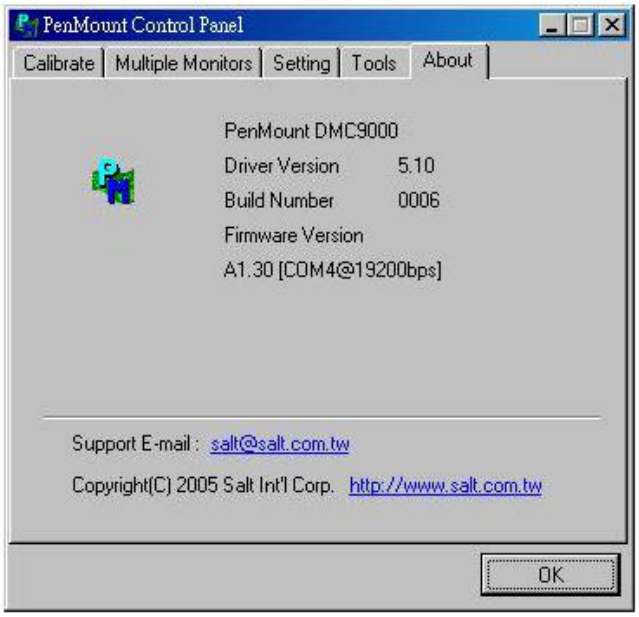

4. Select the "Standard Calibrate" tab.

5. Calibration:

To adjust the display with touch panel, click "Calibration" and follow the calibrate point to do calibration; there are five points on screen for calibration.

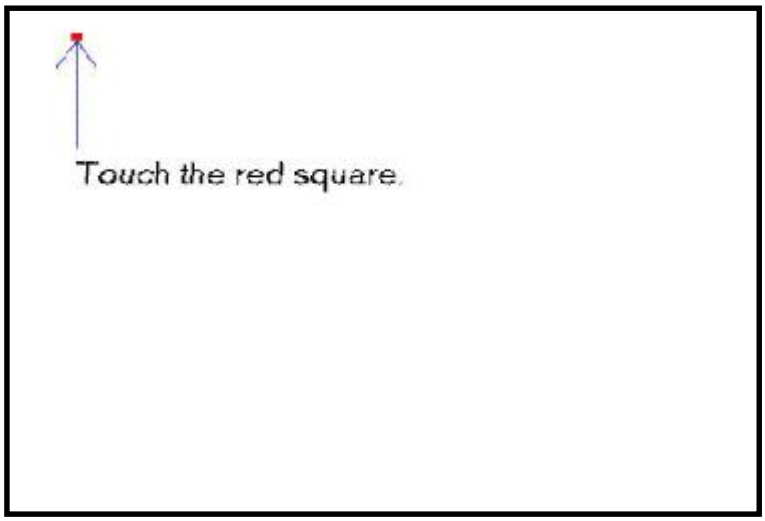

6. Press OK.